

SURFACE MOUNT STROBE, 3 C



3LED*3W




IP67/ IP69K



**MULTI-VOLT
12-24V DC**



Meets CISPR25 Class 3

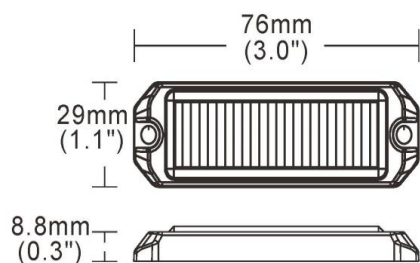

Front



Side

WB-42403-C

SPECIFICATION:

Power	3LED*3W
Voltage range	12-24V DC
Flash pattern	26
Certificate	CE, UKCA, ECE R10
Color	White
Waterproof rate	IP67/ IP69K
Operating temperature	-30°C~+60°C
Material for lens	PC
Material for base	Aluminium